


# CAPEL<sup>®</sup> -205

Capillary electrophoresis system

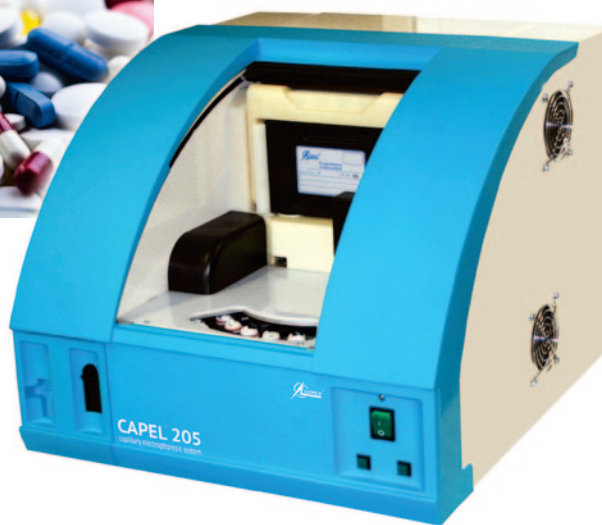

## MAIN APPLICATIONS

### Environmental analysis

- Natural, drinking, and waste water ( $F^-$ ,  $Cl^-$ ,  $Br^-$ ,  $I^-$ ,  $NO_2^-$ ,  $NO_3^-$ ,  $PO_4^{3-}$ ,  $SO_4^{2-}$ , acetate,  $NH_4^+$ ,  $Ba^{2+}$ ,  $Ca^{2+}$ ,  $K^+$ ,  $Mg^{2+}$ ,  $Na^+$ , and other inorganic and organic ions)
- Soils, sludge, and sediments (inorganic and organic anions and cations)

### Animal feeding & Veterinary

- Fodder, mixed fodder, and mixed fodder raw materials (amino acids, cations and anions, organic acids, vitamins)
- Veterinary drugs (antibiotics, antiprotozoal agents)

### Biopharma

- Quality control of therapeutic recombinant proteins
- Protein separation
- Enantiomers separation
- Pharmacokinetics studies

### Food testing

- Bottled water (inorganic and organic anions and cations)
- Carbonated drinks and juices (sweeteners, preservatives, synthetic dyes, antioxidants, vitamins, inorganic cations and anions, organic acids, sugars)
- Beer (inorganic cations and anions, hop and bitter acids (humulones and isohumulones), amino acids, organic acids, vitamins)
- Strong drinks (inorganic cations and anions, aromatic aldehydes, organic acids, sugars)
- Tea, coffee (caffeine, polyphenols)
- Foodstuff (preservatives and other food additives, organic acids, amino acids, amines, proteins)
- Milk and milk products (sugars, inorganic cations and anions, organic acids, vitamins, proteins, sweeteners, preservatives)



# ADVANTAGES OF CAPEL®-205

## High capacity autosampler for sealed vials with automatic opening

- Standard Eppendorf type vial (1.5 mL)
- No sample evaporation
- No sample contamination

## Easy-to-change capillary cassette

- Capillary cassette change just in a few seconds

## Extended instrumental options

- Complete control of the instrument from a PC
- Broad range of controlled injection pressures allows analysis of viscous samples
- Reverse sample injection under vacuum: ultra-short analysis time (less than 1 min) and sample stacking to decrease detection limit
- Spectra scanning facilitates peak identification

## Precise liquid temperature control of capillary ( $\pm 0.1^\circ\text{C}$ )

- Extended range of applied buffers, increased efficiency in separation

## Powerful software package «Elforun®»

- Increased flexibility in performing analyses of various complexity
- Any kinds of complex runs are possible including those with pre-programming of changes in analysis conditions
- Customized report, data export to other programs

## Streaming potential control technique

- Improving repeatability of migration time and accuracy of analysis

## SPECIFICATIONS

Detection wavelength	190–400 nm, light source – deuterium lamp
Analysis	Constant voltage, from –30 kV to +30 kV in 1 kV steps Automatic (electronic) polarity switch
	Current 0–300 $\mu\text{A}$
	Pressure, up to 100 mbar
	Programmable changing of wavelength, pressure and voltage during analysis
Injection	By voltage, from –30 kV to +30 kV in 1 kV steps; by pressure, from –100 to 100 mbar in 1 mbar steps
Rinsing	By pressure, 500–2000 mbar in 1 mbar steps
Capillary	Length 30–120 cm
	Internal diameter 50, 75 $\mu\text{m}$
Temperature control of capillary	Liquid thermostating, from –10 up to +30 $^\circ\text{C}$ from ambient temperature, $\pm 0.1^\circ\text{C}$
Sampler	Autosampler for 59 vials (standard Eppendorf®-type 1.5 mL)
Power requirements	110–240 VAC, 50/60 Hz
Power consumption	170 W
Dimensions/Weight	470x530x410 mm, 30 kg
Control	Elforun® software

## EQUIPMENT & OPTIONS

- Capillary electrophoresis system CAPEL®-205
- Spare capillary cassette
- Elforun® software package
- Kits & sets for analysis (by request)

## SERVICES

Installation of LUMEX instruments can be carried out at a Customer's site by our service engineers. Personnel training specific to the Customer needs can be also provided.

## WARRANTY

All CAPEL®-205 capillary electrophoresis systems are covered by a 12-month warranty.

The information and specifications in this publication are subject to change without notice.

**LUMEX**  
INSTRUMENTS

**Lumex Instruments Canada**  
0890278 B.C. Ltd.  
Unit 207, 31510 Gill Ave.,  
Silver Creek Industrial Park  
Mission, B.C., V4S0A1, Canada  
Phone: +1 604-820-8085  
+1 866-233-6057  
E-mail:  
sales@lumexinstruments.com  
[www.lumexinstruments.com](http://www.lumexinstruments.com)

**Lumex Analytics GmbH**  
Naher str., 8  
24558 Wakendorf II, Germany  
Tel.: +49 (0) 4535 297-756  
Fax: +49 (0) 4535 297-783  
E-mail: info@lumexanalytics.de  
[www.lumexanalytics.de](http://www.lumexanalytics.de)

**Lumex-Marketing LLC**  
pr. Obukhovskoy Oborony, 70,  
bldg. 2, St. Petersburg 192029,  
Russia  
Tel.: +7 (812) 718-5390  
Fax: +7 (812) 718-5399  
E-mail: sales@lumex.ru  
Post address:  
BOX 1234, St. Petersburg,  
190000, Russia  
[www.lumex.ru](http://www.lumex.ru)

**Beijing Lumex Analytical  
Equipment Co. Ltd.**  
Level 19, Tower E2, Oriental  
Plaza, 1 East Chang An Avenue,  
Dong Cheng District,  
Beijing 100738, China  
Tel.: +86 (10) 6412-9525  
Fax: +86 (10) 6242-3844  
E-mail: lumexcn@lumex.com.cn  
[www.lumexcn.com](http://www.lumexcn.com)

